Swivel/gripper units HGDS

FESTO



Swivel/gripper units HGDS

Key features


FESTO

At a glance

Combination of parallel gripper and swivel module


The power transmission from the linear motion to the gripper motion takes place via the piston rod, which opens and closes the gripper jaws housed in the gripper housing via $% \left(1\right) =\left(1\right) \left(1\right$ 2 reversing levers.

The swivel motion takes place via a swivel drive. It can be adjusted almost infinitely via 2 stops (max. 210°). The rotary motion is cushioned either via a flexible cushioning buffer or a hydraulic shock absorber. The swivel angle can be finely adjusted by means of a precision adjustment facility.




- 1 Flexible cushioning or hydraulic shock absorbers
- 2 Slot for proximity sensor SME/SMT-10 for sensing the swivel position
- 3 Gripper compressed air connection, closing
- 4 Slot for proximity sensor SME/SMT-10 for sensing the gripper position
- 5 Gripper compressed air connection, opening
- 6 Gripper jaw
- 7 Adjustable stop plates for the swivel motion, with magnet
- 8 Precise end stop with flexible cushioning or integrated shock absorber
- 9 Rotary vane
- 10 Piston rod for gripping motion
- 11 Piston with magnet

Mounting options Direct mounting



Dovetail connection





Note


Swivel/gripper units are not suitable for the following or similar applications:



- Machining
- Aggressive media



Grinding dust





Swivel/gripper units HGDSPeripherals overview and type codes




Peripherals overview








Acces	Accessories						
	Туре	Brief description	→ Page/Internet				
1	Cushioning P	Non-adjustable, flexible cushioning. Is used for smaller loads	-				
2	Cushioning YSRT	Self-adjusting, hydraulic shock absorber	_				
3	Proximity sensor SME/SMT-10	For sensing the gripper and rotary vane position	12				
4	Push-in fitting QS	For connecting compressed air tubing with standard external diameters	quick star				
5	Centring sleeve ZBH	For centring the gripper when mounting (2 included in scope of delivery)	12				
6	-	Drive/gripper connections	adapter kit				

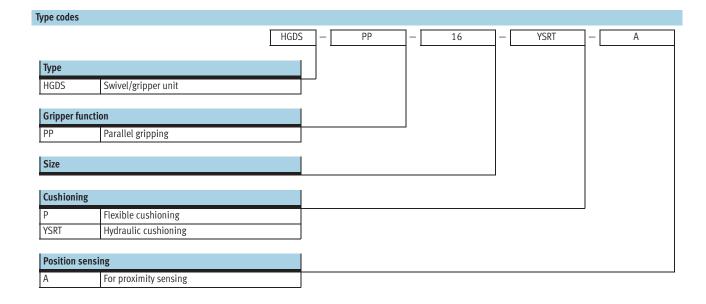

Function Swivelling/Gripping



-N-Size

12, 16, 20

-T-Stroke

5, 9, 14 mm



General technical data						
Size	12	16	20			
Design	Semi-rotary drive					
	Parallel gripper with drive					
Mode of operation	Double-acting	Double-acting				
Pneumatic connection	M5					
Type of mounting	With threaded hole and centring hole					
	Via through-holes					
	Clamped in dovetail slot					
Fitting position	Any					
Relubrication intervals of guide	10 million switching cycles					
Product weight [g]	465	660	1120			

Operating and environmental conditions							
Operating pressure	[bar]	38					
Operating medium		Filtered compressed air, lubricated or unlubricated					
Ambient temperature ¹⁾	[°C]	+5 +60					
Corrosion resistance class CRC ²⁾		2					

Materials

Note operating range of proximity sensors
 Corrosion resistance class 2 according to Festo standard 940 070
 Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

Sectional view 1 2 3 4 5 6

Swivel/gripper unit						
1 Gripper jaw	Wrought aluminium alloy, nickel-plated					
2 Lever	Hardened steel					
3 Stop	Wrought aluminium alloy,					
	hard-anodised					
4 Piston rod	Stainless steel					
5 Housing	Wrought aluminium alloy,					
	hard-anodised					
6 Piston	Nitrile rubber, polyurethane					
 Rubber buffer 	Nitrile rubber					




Technical data - Swivelling

Size			12	16	20	
Swivel angle [°]			0 210 → 10	0 210 → 10		
Theoretical torque ¹⁾ [Nm]			0.85	1.25	2.5	
Repetition	P cushioning	[°]	< 0.2			
accuracy ¹⁾	YSRT cushioning	[°]	< 0.02			
Cushioning			→ 6			
Max. swivelling	P cushioning	[Hz]	2			
frequency ¹⁾	YSRT cushioning	[Hz]	1.5			
Position sensing			For proximity sensing			


1) At 6 bar

Mass moments of inertia J at 6 bar as a function of swivel time t and swivel angle


HGDS-PP-12-P-A




HGDS-PP-12-YSRT-A




HGDS-PP-16-P-A




HGDS-PP-16-YSRT-A



HGDS-PP-20-P-A



HGDS-PP-20-YSRT-A



Dependency between operating pressure and swivel time


When the operating pressure of the gripper drive is reduced, the permissible swivel time at the same mass moment of inertia must be increased by 15% per bar of operating pressure.

Example: Given: $J = 40 \text{ kgm}^2 \text{x} 10^{-4}$ Operating pressure 4 bar (gripper drive)

Swivel time at 6 bar = 0.4 s, see graph opposite

This yields a swivel time at 4 bar: t = 0.4 + 2x 15% = 0.52 sCushioning time of the shock absorber

This yields a swivel time of $t_{tot.} = 0.52 \text{ s} + 0.1 \text{ s} = 0.62 \text{ s}$





Precision adjustment of the swivel angle

The swivel angle can be adjusted roughly by means of two stop plates→ 2. The precision adjustment works as follows: Variants P and YSRT differ in only one

component. The retainer and the fine

adjustment are identical. In both variants, the rotary vane travels to a metallic stop, which can be adjusted with great accuracy via the adjustable sleeve for P cushioning or the shock absorber for YSRT cushioning.

Loosen the locking screw underneath the cushioning



required. Observe the minimum and maximum settings.

2) Adjust the cushioning element as



Min. setting range	,
to the inner stop	



Max. setting range, to the notch



Size			12	16	20
Precision adjustment	P cushioning	[°]	-6		
range	YSRT cushioning	[°]	-2.5		
Swivel angle adjuster		[°]	3.1	2.8	2.2
per revolution					



Technical data - Gripping

Size		12	16	20	
Gripper function		Parallel	Parallel		
Number of gripper fingers		2			
Max. weight force per external gripper	[N]	0.3	0.5	1.0	
finger ¹⁾					
Stroke per gripper jaw	[mm]	2.5	4.5	7	
Max. gripper jaw backlash	[mm]	0			
Max. gripper jaw angular backlash	[°]	0			
Repetition accuracy	[mm]	< 0.02			
Max. operating frequency	[Hz]	4			
Position sensing		Via proximity sensor			


¹⁾ Valid for unthrottled operation

Gripping force [N] at 6 bar								
Size	12	16	20					
Gripping force per gripper jaw	Gripping force per gripper jaw							
Opening	29	56.5	85					
Closing	26	45	65					
Total gripping force								
Opening	58	113	170					
Closing	52	90	130					

Gripping force F_{Grip} per gripper jaw as a function of operating pressure p


Gripping forces related to operating pressure and lever arm can be determined for the various sizes using the following graphs.

The characteristic curves apply for external and internal gripping.



Note


The gripping force is practically independent of the lever arm. Fluctuation at max. lever arm and max. operating pressure approx. 10%.

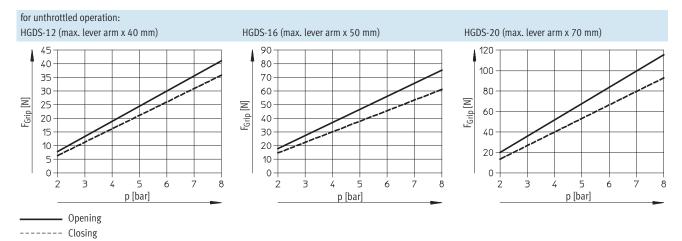


Opening and closing times [ms] at 6 bar

With gripper jaws

With additional gripper fingers






The indicated opening and closing times [ms] have been measured at room temperature and at 6 bar operating pressure with horizontally mounted gripper without external

gripper fingers. The grippers must be throttled for greater applied loads. Opening and closing times must then be adjusted correspondingly.

with additional gripper fingers as a function of weight force								
Size		12	16	20				
Max. weight force		0.3 N	0.5 N	1.0 N				
HGDSA	Opening	20	50	70				
unthrottled	Closing	30	50	100				

with additional gripper fingers as a function of weight force								
Size		12		16		20		
Weight force		1.0 N	2.0 N	1.0 N	2.0 N	1.0 N	2.0 N	
HGDSA	Closing	100	150	100	200	100	250	
throttled								

Eccentricity y as a function of lever arm x



The dependency on the lever arm and the maximum permissible off-centre point of force application can be determined for the various sizes using the following graphs.

The gripping forces apply, see above.


It is vital that you adhere to the mass moment of inertia → 5 when making your selection.

Calculation example

Lever arm x = 40 mmTo be found: Eccentricity y

- Move along the horizontal axis to the point of intersection
- Then move vertically downwards until you intersect the scale
- Read the eccentricity

Max. eccentricity = 30 mm




FESTO


Eccentricity y as a function of lever arm x

for unthrottled operation:


HGDS-12 (max. lever arm 40 mm)




HGDS-16 (max. lever arm 50 mm)



HGDS-20 (max. lever arm 70 mm)



Characteristic load values per gripper jaw





The indicated permissible forces and torques refer to a single gripper jaw. The indicated values include the lever arm, additional applied loads caused by the workpiece or external gripper fingers, as well as forces which occur during movement.

The zero coordinate line (gripper finger guide) must be taken into consideration for the calculation of torques.


Size		12	16	20
Max. permissible force F _z	[N]	20	30	60
Max. permissible torque M _x	[Nm]	1.5	4	8
Max. permissible torque My	[Nm]	1.5	4	8
Max. permissible torque M_Z	[Nm]	1.5	4	8

FESTO

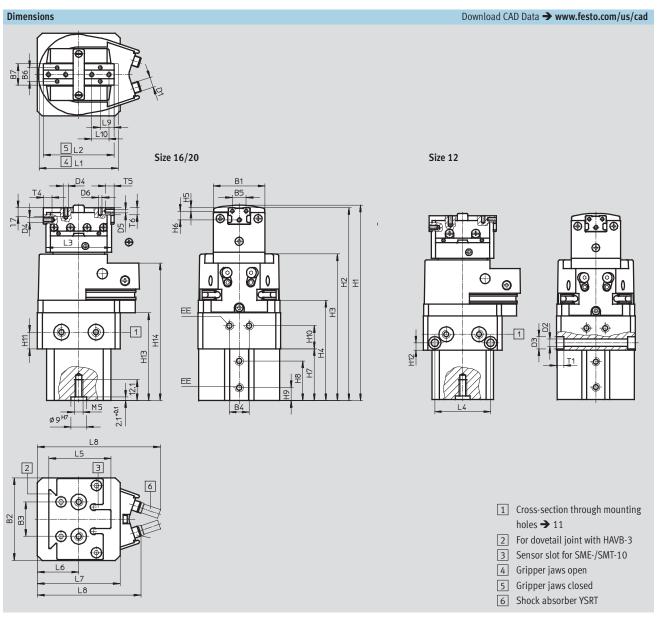

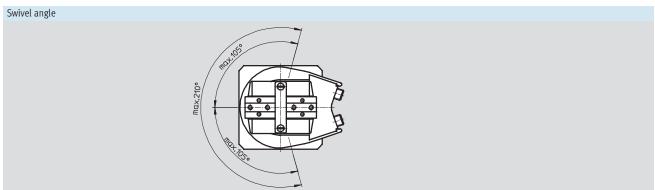



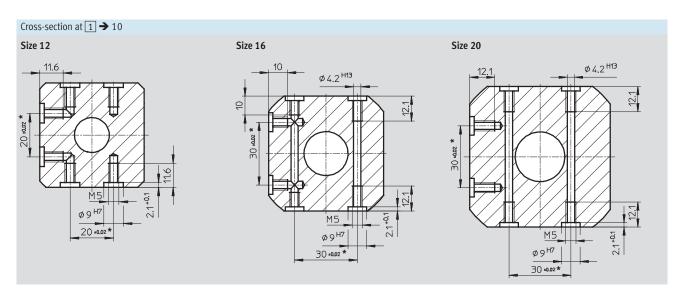

Size	B1	B2	В3	B4	B5	В6	B7	D1	D2	D3	D4	D5
									Ø	Ø		Ø
[mm]		±0.03	±0.02*		±0.02	±0.02	±0.1		H13	H13		Н8
12	30	48	20	11.5	8	8	12.5	M6x0.5	4.5	7.5	M3	2
16	34	55	30	13	10	10	16	M8x1	-	-	M3	2
_												

Size	D6	EE	H1	H2	Н3	H4	H5	Н6	H7	Н8	Н9
	Ø										
[mm]	Н8		+1/-0.6	+0.8/-0.4	+1.3/-0.2	+0.8/-0.2	±0.02	±0.12	±0.1	±0.1	
12	2	M5	113.4	111.9	85.1	58.2	2	5	30	23	7.5
16	2	M5	121.7	120.1	92.1	64.3	3	5	34.5	26	8.3
20	2.5	M5	154.8	152.8	112.3	81.7	3	7	43	34.6	8.3

Size	H10	H11	H12	H13	H14	L1	L2	L3	L4	L5	L6
[mm]		-0.1		+1/-0.2	+1/-0.2	±0.5	±0.5	±0.5	±0.1		±0.05
12	13.5	9.7	4.5	51.3	79.8	46	41	38	34	36	24
16	14	8	-	58.2	86.7	58	49	47	-	40.5	27.5
20	19	9	-	73.1	105.6	78	64	61	-	40.5	34

Size	L7	L		L9	L10	T1	T4	T5	T6	T7
	0.00	±		0.00						
[mm]	±0.03	Р	YSRT	±0.02			min.			min.
12	48	59.5	69.3	8	10	4.6	5	5	4	5
16	55	68.5	80.5	8	10	-	6.5	6	5	5
20	68	85.4	96.4	12	14	-	10	8	7	7

Tolerance valid for centring hole \varnothing 9^{H7}

Swivel/gripper units HGDS Technical data and accessories



Ordering data			
	Size	With flexible P cushioning	With hydraulic YSRT cushioning
		Cushioning element	Shock absorber
	[mm]	Part No. Type	Part No. Type
	12	534 278 HGDS-PP-12-P-A ¹⁾	534 279 HGDS-PP-12-YSRT-A ¹⁾
	16	534 280 HGDS-PP-16-P-A ¹⁾	534 281 HGDS-PP-16-YSRT-A ¹⁾
	20	534 282 HGDS-PP-20-P-A ¹⁾	534 283 HGDS-PP-20-YSRT-A ¹⁾

¹⁾ Two centring sleeves are included in the scope of delivery

Ordering data	– Accessories			Technical data → Interne	et: zbh
	For size	Weight	Part No.	Туре	PU ¹⁾
	[mm]	[g]			
Centring sleeve					
9	12, 16, 20	1	150 927	ZBH-9	10

¹⁾ Packaging unit quantity

Ordering data	- Proximity sensors for C-sl		Technical data → Internet: smt			
	Type of mounting	Switch	Electrical connection,	Cable length	Part No.	Туре
		output	connection direction	[m]		
1110						
N/O contact						
N/O contact	Insertable in the slot from	PNP	Cable, 3-wire, lateral	2.5	551 374	SMT-10M-PS-24V-E-2,5-Q-0E

Ordering data	- Proximity sensors for C-sl		Technical data → Internet: sme			
	Type of mounting	Switch	Electrical connection,	Cable length	Part No.	Туре
		output	connection direction	[m]		
N/O contact						
N/O contact	Insertable in the slot from	Contacting	Plug M8x1, 3-pin, lateral	0.3	551 368	SME-10M-DS-24V-E-0,3-Q-M8D


Swivel/gripper units HGDS Accessories

point has been set.

FESTO

If the swivel/gripper unit is mounted on the front, proximity sensors with the connecting cable at right angles should be used. When proximity sensors with in-line connecting cables are used, the sensors project beyond the swivel/gripper unit after the switching Projection: With proximity switch SMT-...: HGDS-PP-12: 8,3 mm HGDS-PP-16: 7,1 mm HGDS-PP-20: 4,4 mm

With proximity switch SME-...: HGDS-PP-12: 2,7 mm HGDS-PP-16: 2,1 mm HGDS-PP-20: 0 mm



Ordering data	- Proximity sensors for C-sl		Technical data → Internet: smt			
	Type of mounting	Switch	Electrical connection,	Cable length	Part No.	Туре
		output	connection direction	[m]		
N/O contact						
	Insertable in the slot from	PNP	Cable, 3-wire, in-line	2.5	551 373	SMT-10M-PS-24V-E-2,5-L-OE
- A-13						

Ordering data	- Proximity sensors for C-sl		Technical data → Internet: sme			
	Type of mounting	Switch output	Electrical connection, connection direction	Cable length [m]	Part No.	Туре
N/O contact						
	Insertable in the slot from	Contacting	Plug M8x1, 3-pin, in-line	0.3	551 367	SME-10M-DS-24V-E-0,3-L-M8D
N/O contact	Insertable in the slot from above	Contacting	Plug M8x1, 3-pin, in-line Cable, 3-wire, in-line	0.3	551 367 551 365	SME-10M-DS-24V-E-0,3-L-M8D SME-10M-DS-24V-E-2,5-L-OE

Ordering data	- Connecting cables				Technical data → Internet: nebu
	Electrical connection, left	Electrical connection, right	Cable length	Part No.	Туре
			[m]		
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 333	NEBU-M8G3-K-2.5-LE3
OF THE PERSON NAMED IN COLUMN TO PERSON NAME			5	541 334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 338	NEBU-M8W3-K-2.5-LE3
			5	541 341	NEBU-M8W3-K-5-LE3

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components Complete custom engineered solutions



Custom Control Cabinets Comprehensive engineering support and on-site services



Complete Systems Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical Electromechanical actuators, motors, controllers & drives



Pneumatics Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Festo North America

Festo Regional Contact Center

5300 Explorer Drive Mississauga, Ontario L4W 5G4 Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786) 1.800.96.FESTO (1.800.963.3786) Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786) Fax: 1.800.96.FESTO (1.800.963.3786) Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786) Fax: 1.877.FX.FESTO (1.877.393.3786) Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation 395 Moreland Road P.O. Box 18023 Hauppauge, NY 11788, USA www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330 Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600 Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center 2601 Cambridge Court, Suite 320 Auburn Hills, MI 48326, USA

New York

395 Moreland Road Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788 Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4 Phone: 1.905.624.9000; Fax: 1.905.624.9001; Email: festo.canada@ca.festo.com

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquinahuac, 54020 Tlalnepantla, Edo, de México Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65; Email: festo.mexico@mx.festo.com www.festo.com/mx

Central USA

Festo Corporation 1441 East Business Center Drive Mt. Prospect, IL 60056, USA Phone: 1.847.759.2600 Fax: 1 847 768 9480



Western USA

Festo Corporation 4935 Southfront Road, Livermore, CA 94550. USA

Phone: 1.925.371.1099 Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela